

Flat jet inserts

Flat jet nozzles are designed for high pressure washing applications.

Their specifically designed inner profile allows for even jet distribution, which results in effective and uniform cleaning action over the surface being processed.

Material: AISI 416 Stainless steel, hardened.

Connection: 1/4" M BSPT.




Applications:

machines and car wash plants, industrial cleaning, high-pressure washers

15°	25°	40°	65°	Part Number (*)	Inlet	Equiv. DN mm	Nozzle capacity at different pressure values (lpm)						
FBB	FBD	FBL	FBR				20 bar	30 bar	50 bar	70 bar	100 bar	150 bar	200 bar
	•	•		1460.C2	1/4" M	0,70	2,0	2,4	3,1	3,7	4,4	5,4	6,2
	•			1560.C2	1/4" M								
	•	•		1686.C2	1/4" M	1,12	3,0	3,6	4,7	4,7	6,6	8,1	9,3
				2103.C2	1/4" M	1,35	4,6	5,6	7,3	7,3	10,3	12,6	14,6
•	•	•	•	2116.C2	1/4" M	1,42	5,1	6,2	8,1	8,1	11,4	14,0	16,1
	•	•		2138.C2	1/4" M	1,54	6,1	7,4	9,6	11,4	13,6	16,7	19,2
•		•		2160.C2	1/4" M	1,66	7,2	8,8	11,3	13,4	16,0	19,6	22,6
		•		2181.C2	1/4" M	1,76	8,1	9,9	12,8	15,1	18,1	22,2	25,6
		•		2230.C2	1/4" M	1,98	10,1	12,4	16,0	16,0	22,6	27,7	32,0
		•		2341.C2	1/4" M	2,40	15,2	18,6	24,0	24,0	34,1	41,5	47,9

(*) Inserts with other jet angle available on request. Combine the first 4 columns prefix with the fifth column suffix (e.g. FBD.1460.C2)

Flushing nozzles

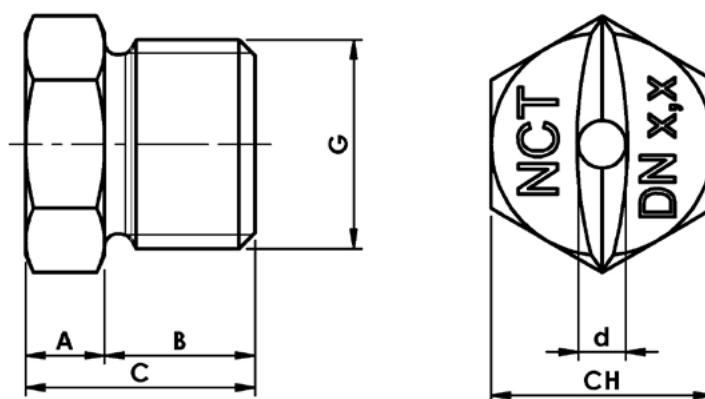

Part number	Description	Equiv. DN (mm)	A (mm)	B (mm)	C (mm)	G BSPP	CH (mm)
5507.10-25	Flushing nozzle TE 1/4" M	2,5	5	9,5	14,5	1/4"	14
5507.10-30	Flushing nozzle TE 1/4" M	3,0	5	9,5	14,5	1/4"	14
85522.01-20	Flushing nozzle TE 1/2" M	2,0	7	13	10	1/2"	22
85522.01-25	Flushing nozzle TE 1/2" M	2,5	7	13	10	1/2"	22
85522.01-30	Flushing nozzle TE 1/2" M	3,0	7	13	10	1/2"	22