


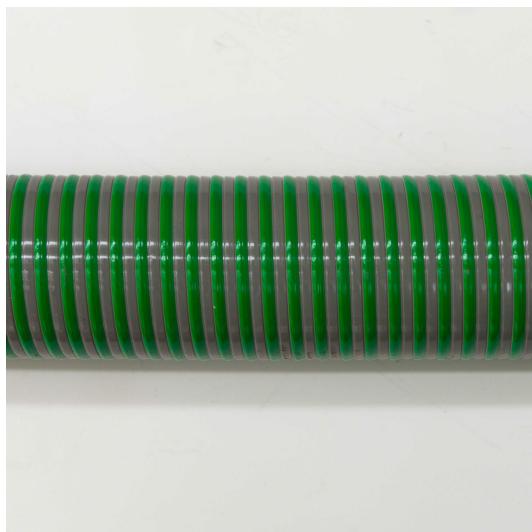

Overview

A white spiral helix embedded in a grey superelastic flexible PVC. The hose has a patented and distinctive green external spiral scuff strip.

Characteristics

APPLICATIONS:

A cesspit and gully emptying hose, waste water hose, widely used in agriculture as tanker slurry hose, injector hose, irrigator, used as grain animal feed hose.

ADVANTAGES:

Very easy to handle, performs very well at low temperature. Excellent weathering resistance. Good crush and scuff resistance.

TEMPERATURE RANGE:

-25°C +55°C

Technical Specifications

DN (mm)	50	80	100	110	150
Thickness (mm)	5,5	6,3	7,3	7,5	9
Weight (g/m)	1050	1850	2700	3100	5000
Bending Radius (mm)	200	320	400	440	600
Working Pressure (bar)	5,0	3,5	3	3	2
Bursting Pressure (bar)	15,0	10,5	9	9	6
Standard roll length (m)	50	30	30	30	20

Items

Part Number	Description
2020.50	ARIZONA SE DN50 SUCTION HOSE
2020.80	ARIZONA SE DN80 SUCTION HOSE
2020.100	ARIZONA SE DN100 SUCTION HOSE
2020.110	ARIZONA SE DN110 SUCTION HOSE
2020.150	ARIZONA SE DN150 SUCTION HOSE